


CIRCLING RWY 33

VAR 4° E

AD ELEV 1411 FT

Radar 123.725Mhz
Tower 118.100Mhz
Delivery 121.750Mhz
Atis 133.330Mhz

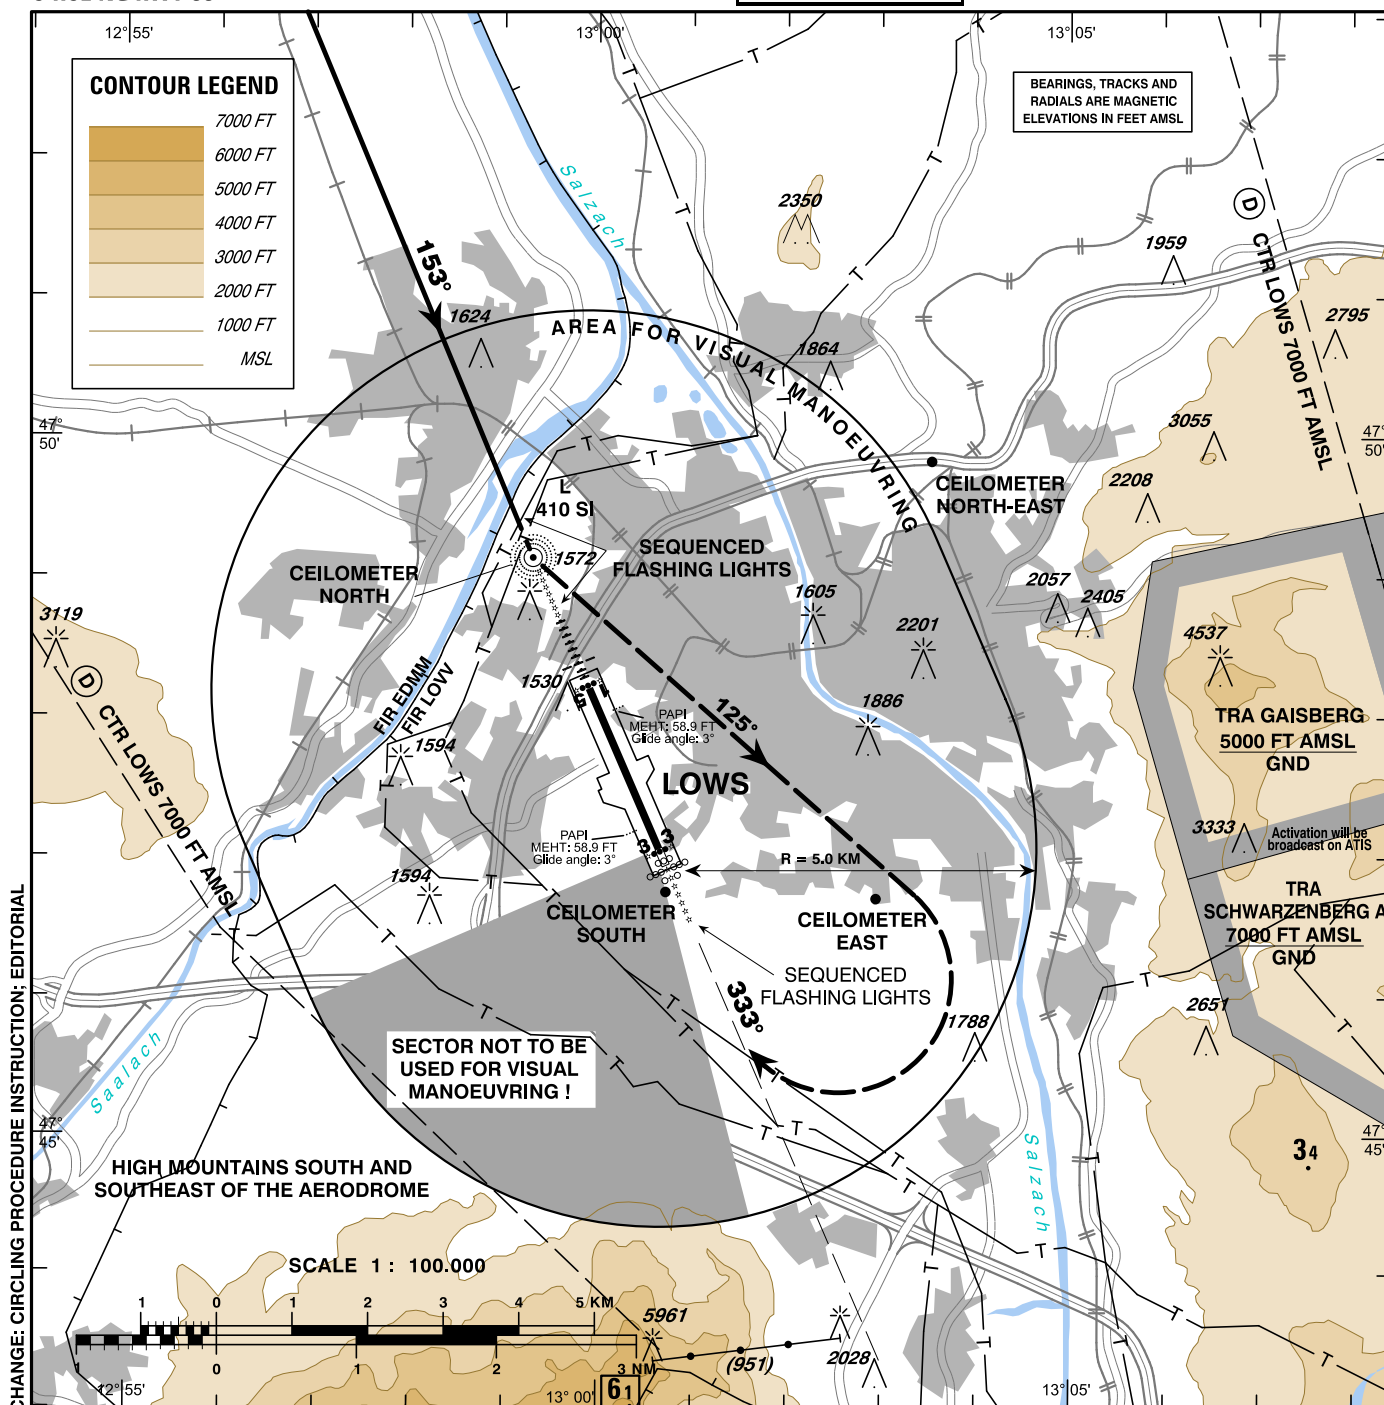

A/C CATEGORY	OCA CIRCLING FT AMSL	MNM REQUIRED FLIGHT VISIBILITY
A	2510	2.8 KM
B		
C	2610	3.7 KM
D	2610	4.6 KM

CIRCLING PROCEDURE RWY 33:

Complete a published instrument approach to RWY 15;
After MAPt/Minimum and before reaching the L SI continue VISUALLY on track 153° to L SI. After passing L SI proceed approximately on track 125° 3.5 NM followed by right turn for positioning on to final RWY 33; do not overshoot QDM 333°.

If visual reference is lost:

Climb to the minimum circling altitude or higher and follow the proposed lateral circling track to RWY 33; do not overshoot QDM 333° L SI; proceed to L SI and thereafter direct to the MA holding point of the flown instrument approach. Climb to 6000ft AMSL and hold.