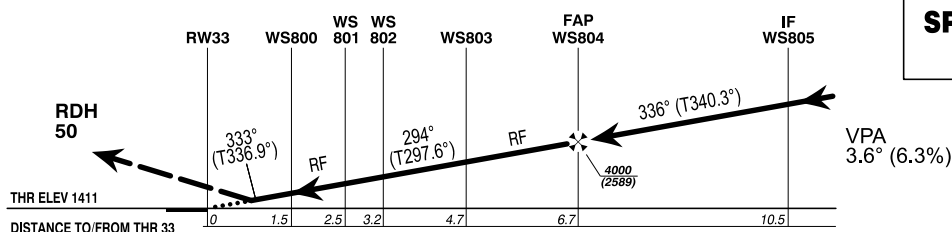
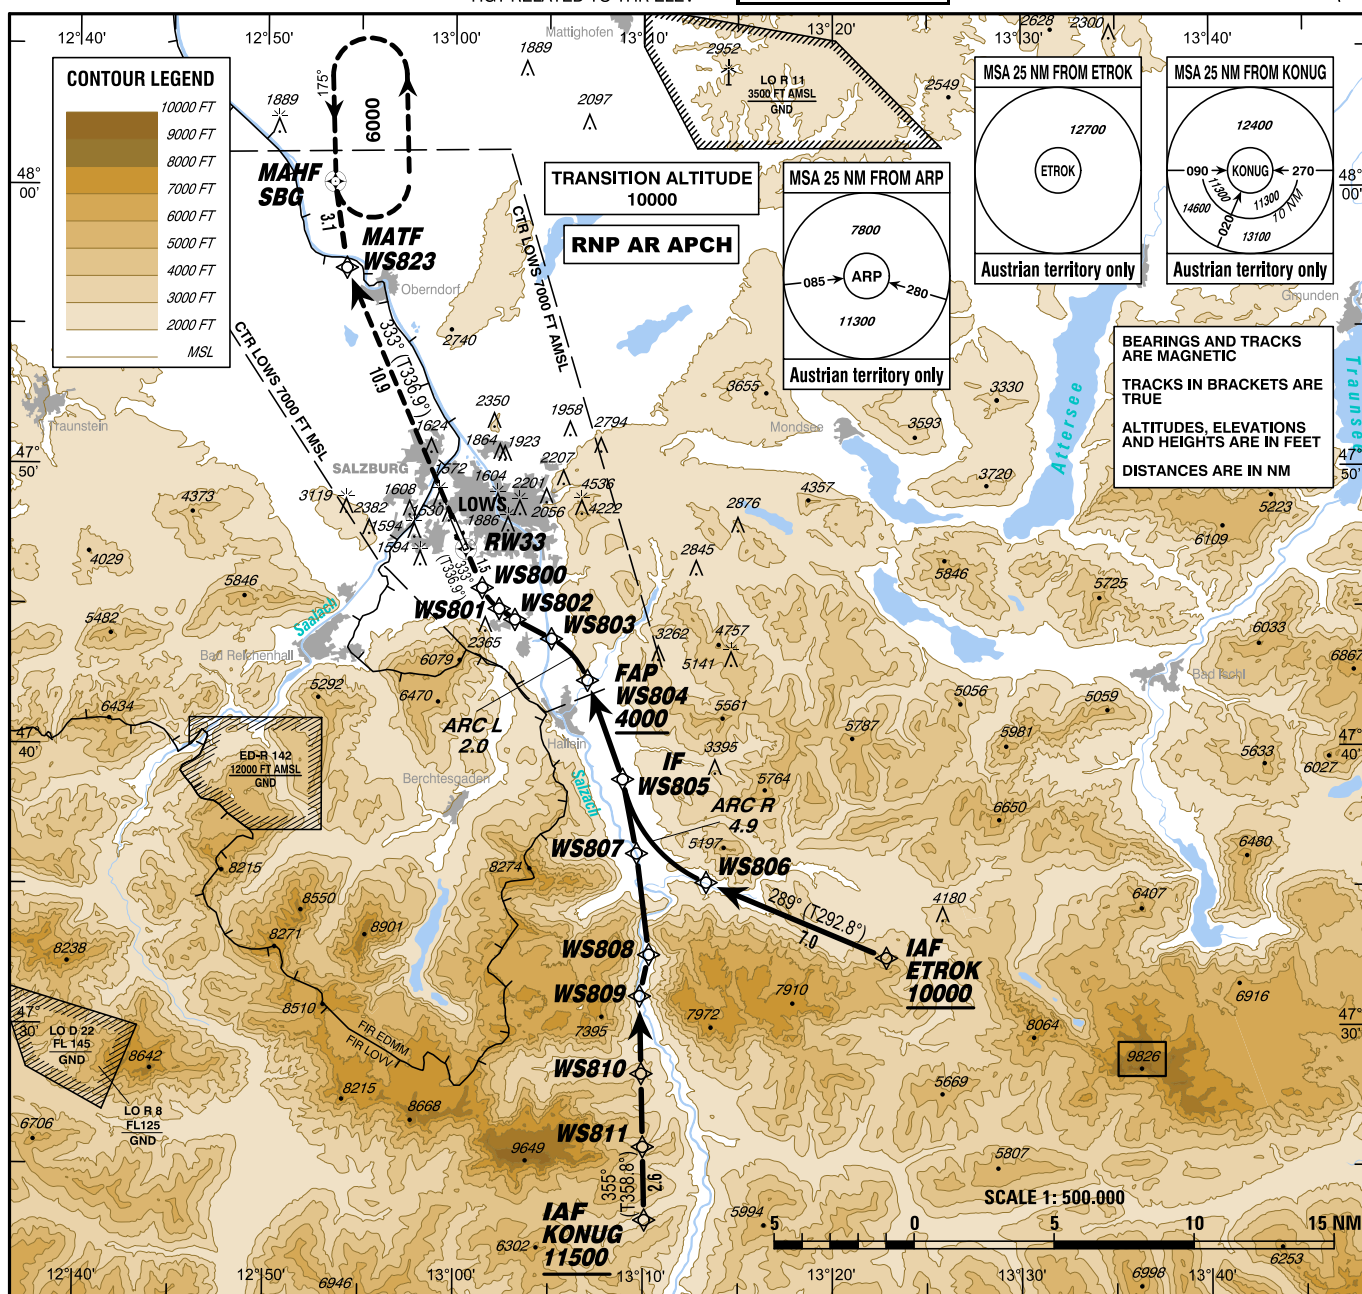


INSTRUMENT  
APPROACH CHART - ICAO

VAR 4° E

AD ELEV 1411 FT  
THR 33 ELEV 1411 FT  
HGT RELATED TO THR ELEVRadar 123.725Mhz  
Tower 118.100Mhz  
Delivery 121.750Mhz  
Atis 133.330Mhz**SALZBURG**  
ÖSTERREICH AUSTRIA  
RNP Z RWY 33 (AR)**SPECIAL AUTHORIZATION  
REQUIRED**

OCA (OCH) IN FT	A	B	C
RNP 0.3	1780 (369)		

GS (KT)	80	100	120	140	160	180
FT / MIN	510	640	770	890	1020	1150

1. Dual GNSS and at least one IRU or equivalent
2. DME/DME, LOC and VOR/DME updating not authorized
3. For uncompensated Baro-VNAV systems, procedure not authorized below AD temp -15°C
4. VPA exceeds 3.6° above +12°C
5. PAPI angle not coincident with the VPA

**MISSED APPROACH:**

CLIMB VIA WS823 AND SBG TO 6000 FT AMSL AND HOLD.

This procedure is permissible  
for special equipped  
aircraft and requires  
authorization by  
Austro Control GmbH

(for detailed Information  
see LOWS AD 2.22, Item 9)

### Instrument Approach Procedure Coding Table Salzburg RNP Z RWY 33 (AR) - via ETROK

Path Terminator	Waypoint				Course/ Track ° MAG (° True)	DIST NM	Turn Direction	ARC Centre Waypoint		ARC Radius NM
	Identifier	Type	Flyover	Coordinates				Identifier	Coordinates	
IF	ETROK	IAF	no	N473227.17 E0132251.17						
TF	WS806		no	N473509.18 E0131319.96	289° (292.8°)	7.0				
RF	WS805	IF	no	N473850.16 E0130854.96		4.9	right	WS822	N473945.81 E0131611.01	5.0
TF	WS804	FAP	no	N474221.95 E0130702.79	336° (340.3°)	3.8				
RF	WS803		no	N474350.81 E0130508.18		2.0	left	WS821	N474127.34 E0130317.04	2.7
TF	WS802		no	N474431.87 E0130311.74	294° (297.6°)	1.5				
TF	WS801		no	N474455.14 E0130221.70	301° (304.6°)	0.7	right			
RF	WS800		no	N474539.81 E0130127.60		1.0	right	WS820	N474620.41 E0130348.99	1.7
TF	RW33		yes	N474702.57 E0130035.34	333° (336.9°)	1.5				
TF	WS823	MATF	no	N475704.79 E0125413.55	333° (336.9°)	10.9				
TF	SBG	MAHF	yes	N480009.30 E0125333.94	348° (351.8°)	3.1	right			

Waypoint	Constraints		RNP Value NM	Navigation Specification	Remarks
	Identifier	Level	Speed		
ETROK	A10000+			0.3	RNP AR APCH
WS806	A7400+			0.3	RNP AR APCH
WS805	A5500+			0.3	RNP AR APCH
WS804	A4000+			0.3	RNP AR APCH
WS803				0.3	RNP AR APCH
WS802				0.3	RNP AR APCH
WS801				0.3	RNP AR APCH
WS800				0.3	RNP AR APCH
RW33				0.3	RNP AR APCH
WS823				1.0	RNP AR APCH
SBG	A6000+			1.0	RNP AR APCH

#### RNAV Holding

Holding Point	Inbound Track ° True	Inbound Track ° MAG	Turn Direction	MAX IAS	Minimum Holding Altitude FT MSL / FL	Time	DIST NM	Remarks
SBG	178.8°	175°	left		A6000	1 MIN		

Instrument Approach Procedure Coding Table  
Salzburg RNP Z RWY 33 (AR) - via KONUG

Path Terminator	Waypoint				Course/ Track ° MAG (° True)	DIST NM	Turn Direction	ARC Centre Waypoint		ARC Radius NM
	Identifier	Type	Flyover	Coordinates				Identifier	Coordinates	
IF	KONUG	IAF	no	N472306.07 E0131004.66						
TF	WS811		no	N472542.82 E0130959.79	355° (358.8°)	2.6				
TF	WS810		no	N472819.58 E0130954.91	355° (358.8°)	2.6				
TF	WS809		no	N473105.81 E0130949.73	355° (358.8°)	2.8				
TF	WS808		no	N473234.56 E0131018.56	009° (012.4°)	1.5	right			
TF	WS807		no	N473611.40 E0130939.49	349° (353.1°)	3.6	left			
TF	WS805	IF	no	N473850.16 E0130854.96	345° (349.3°)	2.7	left			
TF	WS804	FAP	no	N474221.95 E0130702.79	336° (340.3°)	3.8	left			
RF	WS803		no	N474350.81 E0130508.18		2.0	left	WS821	N474127.34 E0130317.04	2.7
TF	WS802		no	N474431.87 E0130311.74	294° (297.6°)	1.5				
TF	WS801		no	N474455.14 E0130221.70	301° (304.6°)	0.7	right			
RF	WS800		no	N474539.81 E0130127.60		1.0	right	WS820	N474620.41 E0130348.99	1.7
TF	RW33		yes	N474702.57 E0130035.34	333° (336.9°)	1.5				
TF	WS823	MATF	no	N475704.79 E0125413.55	333° (336.9°)	10.9				
TF	SBG	MAHF	yes	N480009.30 E0125333.94	348° (351.8°)	3.1	right			

Waypoint	Constraints		RNP Value NM	Navigation Specification	Remarks
	Level	Speed			
KONUG	A11500+		0.3	RNP AR APCH	
WS811	A10500+		0.3	RNP AR APCH	
WS810	A9500+		0.3	RNP AR APCH	
WS809	A8500+		0.3	RNP AR APCH	
WS808	A7900+		0.3	RNP AR APCH	
WS807	A6500+		0.3	RNP AR APCH	
WS805	A5500+		0.3	RNP AR APCH	
WS804	A4000+		0.3	RNP AR APCH	
WS803			0.3	RNP AR APCH	
WS802			0.3	RNP AR APCH	
WS801			0.3	RNP AR APCH	
WS800			0.3	RNP AR APCH	
RW33			0.3	RNP AR APCH	
WS823			1.0	RNP AR APCH	
SBG	A6000+		1.0	RNP AR APCH	

## RNAV Holding

Holding Point	Inbound Track ° True	Inbound Track ° MAG	Turn Direction	MAX IAS	Minimum Holding Altitude FT MSL / FL	Time	DIST NM	Remarks
SBG	178.8°	175°	left		A6000	1 MIN		