For Flight Simulation and non commercial use only !
Courtesy of Austro Control GmbH

INSTRUMENT APPROACH CHART - ICAO

VAR 4° E

AD ELEV 980 FT
THR 08 ELEV 978 FT
HGT RELATED TO THR ELEV
CIRCLING HGT RELATED TO AD ELEV

Radar	125.685Mhz
Tower	118.800Mhz
Atis	128.130Mhz

L I N Z (LOWL)

ÖSTERREICH AUSTRIA

ILS or LOC RWY 08

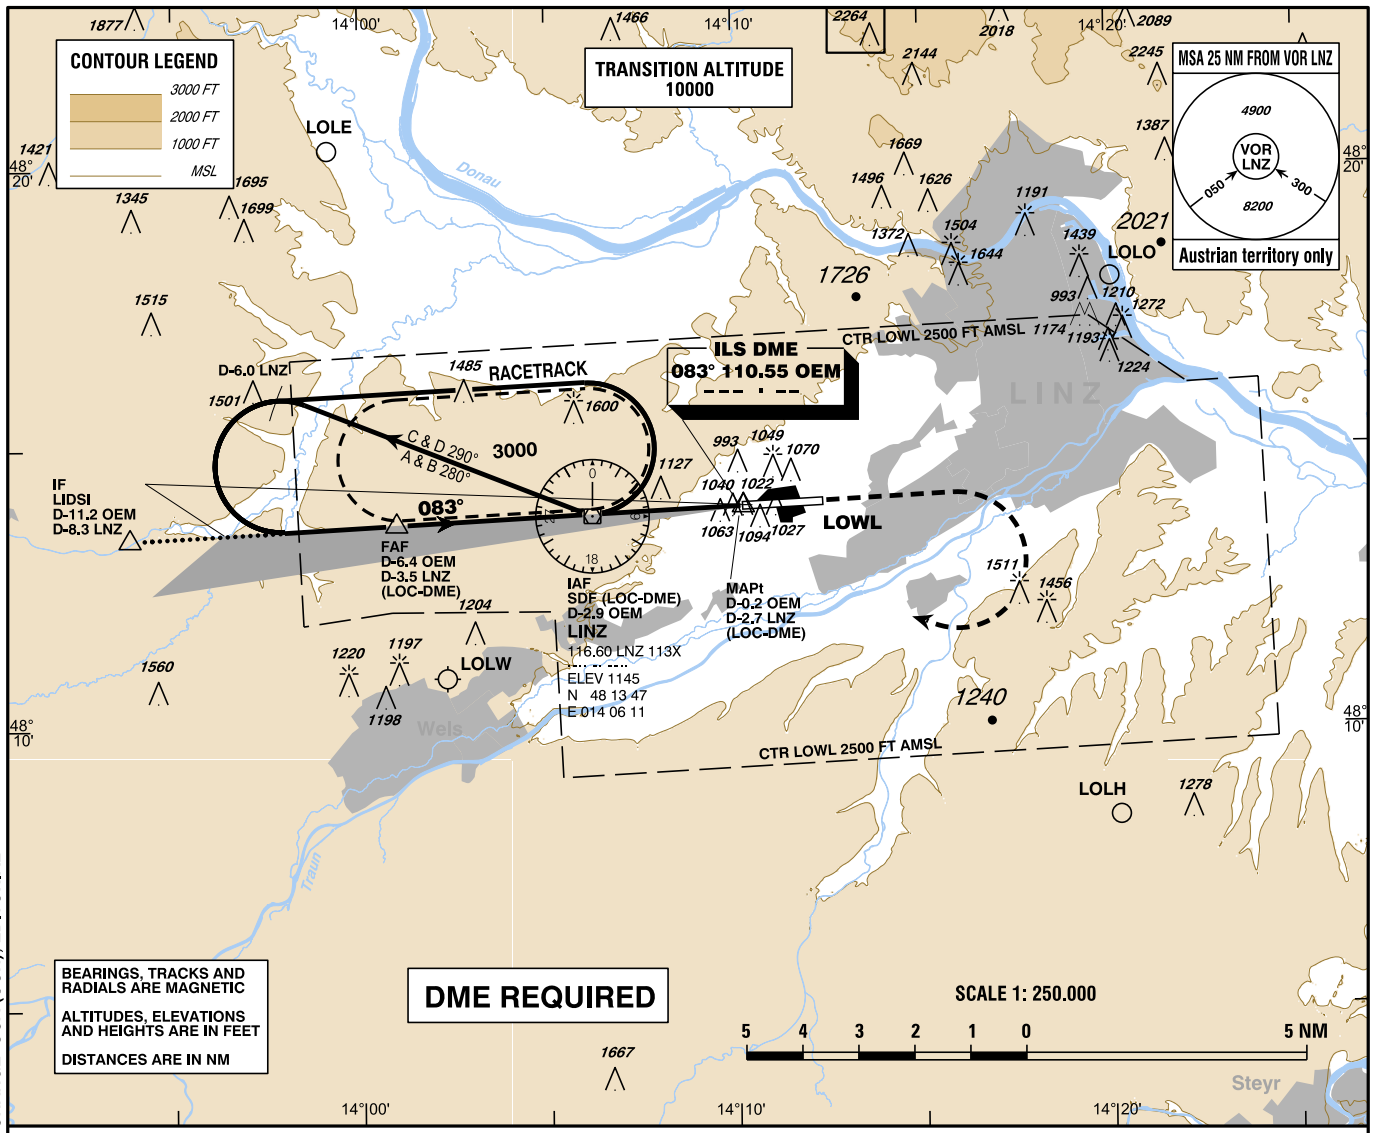

CHANGE: OCA (OCH); EDITORIAL

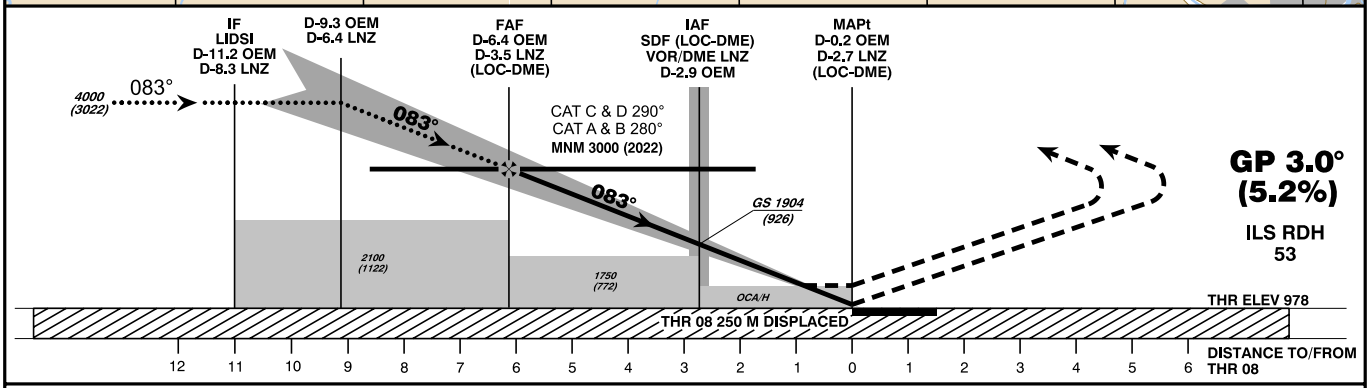

MISSED APPROACH: CLIMB STRAIGHT AHEAD, WHEN PASSING 3000 FT AMSL TURN RIGHT TO VOR/DME LNZ; CONTINUE CLIMB TO 4000 FT AMSL AND HOLD.

OCA (OCH) IN FT		A	B	C	D / D_L
STRAIGHT-IN APPROACH	CAT I Press. Altim.	1139 (161)	1152 (174)	1160 (182)	1170 (192)
	LOC-DME	1480 (502)			
CIRCLING		1480 (500)	1550 (570)	1930 (950)	
CIRCLING NOT AUTHORIZED NORTH OF THE AD					

D-6.4 OEM to THR 08 - DISTANCE 6.2 NM
(Timing not authorized for defining the MAPt)

	GS (KT)	80	100	120	140	160	180
D-6.4 OEM - THR 08	MIN : SEC	4:38	3:43	3:06	2:39	2:19	2:04
Rate of descent (5.2%)	FT / MIN	420	530	640	740	850	960

DME OEM	6	5	4	3	2
DIST THR	5.8	4.8	3.8	2.8	1.8
ALT (HEIGHT)	2890 (1912)	2570 (1592)	2250 (1272)	1930 (952)	1610 (632)

© Austro Control GmbH

vacc AUSTRIA